

Sump Pumps

CS SERIES 1/3 HP Sump Packaged Systems



Applications

- Low lying areas needing drainage, residential crawl spaces

Features

- 1/3 hp cast iron pump with overload protection
- 18" x 22" (46 cm x 56 cm) light weight perforated polypropylene basin
- Structural foam cover with slip fit flanges
- 1-1/4" x 24' (31.7 mm x 7.3 m) discharge hose kit
- 1-1/2" MNPT (38 mm) x 1-1/4" (31.7 mm) barbed check valve
- cCSAus listed pump

Series Specifications

Capacity: 50 gpm @ 5' (189 lpm @ 1.5 m)

Shut Off: 22' (6.7 m)

Liquid Temperature: 140 °F (60 °C)

Discharge: 1-1/2" FNPT (38 mm)


Impeller: Vortex

Electrical: 115 V, 60 Hz

Operation: Automatic

Solids Handling: 1/2" (12.7 mm)

Performance Curve

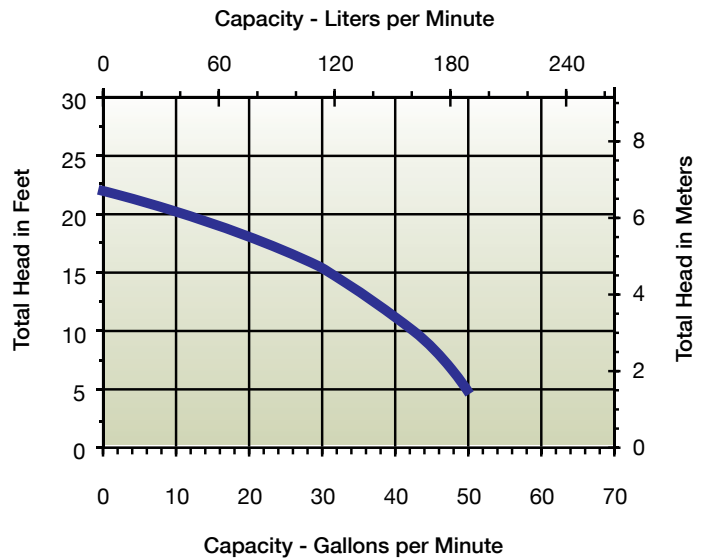

Model Characteristics

Item #	Model	Volts	Cord	Switch Type	On Level	Off Level
14940655	CS-SS	115	25' 7.6 m	Integral Snap Action Float	7" - 10" 17.8 cm - 25.4 cm	2" - 5" 5 cm - 12.7 cm

Features

